




STUDY GUIDE



CIRCULAR SAW/TABLE SAW

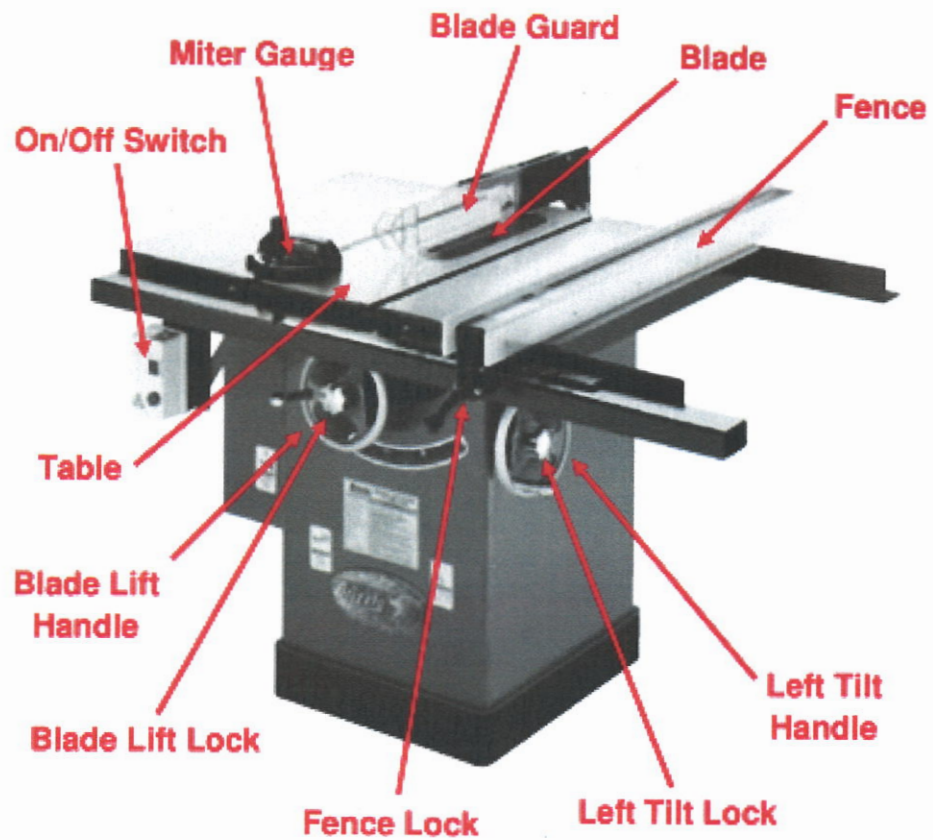

1. Keep the guard over the blade.
2. Keep the splitter up.
3. Adjust the saw blade so it is no higher than 1/4 inch above the board.
4. Use a push stick on narrow strips of lumber.
5. Use the ripping fence.
6. Hold lumber with your LEFT HAND. Your left hand must NEVER come near the saw blade!
7. Push lumber past the saw blade with your RIGHT HAND.
8. Push lumber clear of the saw blade so that it will not kick back.
9. Stand in back of the saw and slightly to the left of your work.
10. Stop the saw before making adjustments.



11. Wait until the blade stops before raising the guard.
12. Do not remove small pieces from near the blade while the machine is running.
13. When helping others saw a long piece, only support the board: do not push or pull!
14. Cylindrical or round stock work must never be cut on the circular saw.
15. If the saw binds, hold down on the board and shut off the power.
16. Turn off the power before you leave the machine.